



Entsprechend RoHS
(EG2002/95/EC)
Prüfzeichen EN 61058-1




Ausführung / construction: Dimmerpotentiometer,
PUSH/PUSH switch,
1-pol UM / change over

Welle / shaft: \varnothing 4 mm, L = 30 mm
 \varnothing 6 mm, L = 35 mm

Buchse / bushing: M10 x 0,75

ALPHASTAT 16 XA16ECO/10APP

Printausführung / for printed circuits (PC)
Conductive Plastic

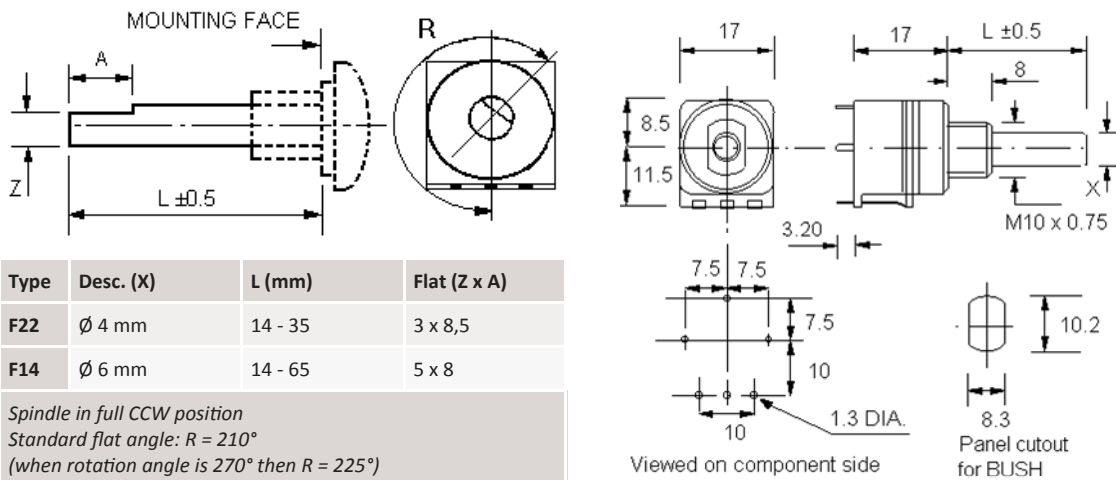

	4 mm Welle F22-PC			6 mm Welle F14-PC			4 mm Welle F21-OW			6 mm Welle F1-OW		
	lin.	poslog	neglog	lin.	poslog	neglog	lin.	poslog	neglog	lin.	poslog	neglog
100 R												
220 R												
470 R												
1 k	7832			7912								
2,2 k	7833			7913								
4,7 k	7834	7847		7914	7927							
10 k	7835	7848		7915	7928							
22 k	7836	7849		7916	7929							
47 k	7837	7850		7917	7930							
100 k	7838	7851		7918	7931							
220 k	7839	7852		7919	7932							
470 k	7840	7853		7920	7933							
1 M	7841			7921								
2,2 M												
4,7 M												

* lagermäßige Ausführungen (unverbindlich) \\ * in stock (non-binding)